



The Cord

Composition: 100% polyester

Width: 145 cm

Weight: 290 gsm

Wyzenbeek Abrasion (ASTM D4157): >45,000 Double Rubs

Martindale Abrasion (ASTM D4966): No Wear at 25,000 movements

Breaking (Tensile) Strength (ASTM D5034): Warp 75.2, Fill 74.2

Tear Strength Tongue Method (ASTM D2261): Warp 21.5, Weft 18.7

Yarn Slippage (ASTM D4034): Warp 103.9, Weft 84.2

Martindale Pilling (ASTM D4970): Grade 4

Color Fastness to Light (AATCC 16 OPTION 3): 3.5

Color Fastness to Wet /Dry Crocking (AATCC 8): Wet 4.5, Dry 4.5

Flame Retardant - CAL 117-2013, Section 1: PASS

Flame Retardant UFAC (SAME AS NFPA 260): PASS

CARE INSTRUCTIONS

Dry clean





1



2



4



23



5



8



6



9



10



40



7



11



13



20



41



42



43



44



34



35



50



45



47




48



52



51

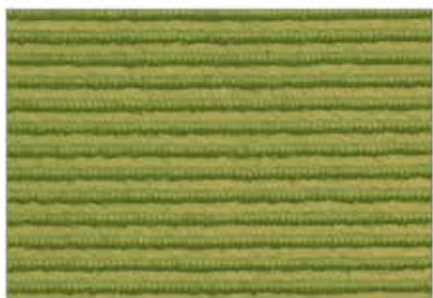

25



53



31



30



32



55



57



58