


nachik



V E R S U S

ENTWINE

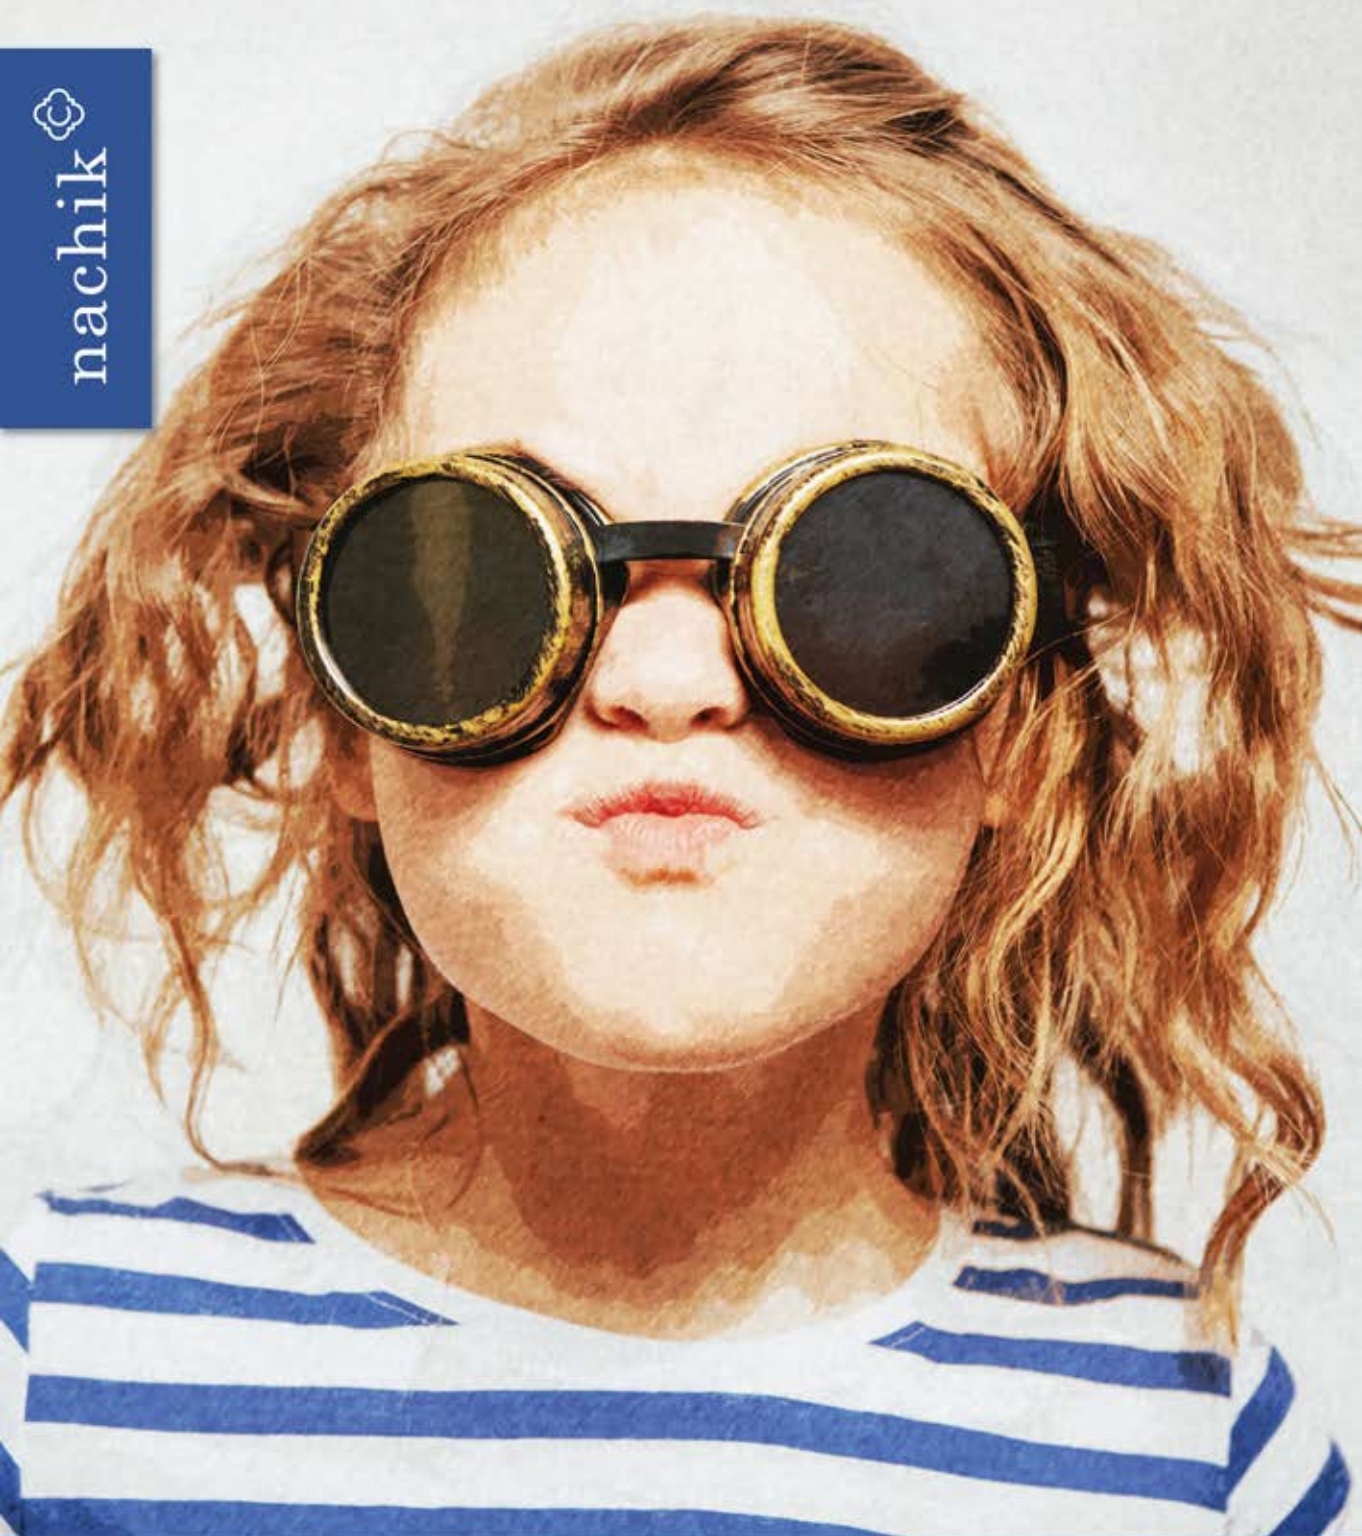

ENTWINE

VERSUS

Composition: 100% polyester

Weight: 430 gsm

Width: 140 cm

TECHNICAL DETAILS

Abrasion resistance: (BS EN ISO 12947-2/BS EN 14465: 2003 Annex a): >45,000 rubs

Change in shade @ 3000 revs: grade: grade 4

Colour fastness to rubbing (dry): BS EN ISO 105 x 12: 2002: 4-5

Colour fastness to rubbing (wet): BS EN ISO 105 x 12: 2002: 3-4

Pilling resistance: ISO 12945-1:2000: 4-5

Colour Fastness to Light: ISO 105-B02:2014: 4

Colour Fastness to Dry cleaning: ISO 105-D01:2010: 4-5

Flame retardant: BS 5852: part 1:1979, Ignition source 0 (Cigarette): PASS

Flame retardant: BS EN 1021-1: 2014 (Cigarette test): PASS

Tensile Strength - strip method: (BS EN ISO 13934-1:2013): 600N

Seam slippage: (BS EN ISO 13936-2:2004): 4mm

Breaking Strength (ASTM D5034-09 2017): Warp 136, Fill 140

Yarn Slippage (ASTM D4034-91): Warp 100.5, Weft 100.5

Flame Retardant cigarette ignition resistance (NFPA 260 standard): PASS class 1

Dimensional Stability to Washing: ISO 5077: 2007 / ISO 3759: 2011 / ISO 6330: 2012: lengthwise -1%, widthwise -0.8%

Formaldehyde: ISO 14184-1: 2011: ND

Azo Dyes: EN 14362-1:2012: ND

Air Permeability of Textile Fabrics: ISO 9237:1995: Average: 217, CV%: 1.7

CARE INSTRUCTIONS



Usage: Upholstery, Cushions.



60



61



76



69



81



2



30



1



108



9



87



97



96



74



104



99



98



88



94



86



91




92



95



116



103



59



39



43



45



46



47



17



5



23



15



13



12



11



71



72



70



77



75



82




28




29




109



84



114



118



101