

HI.
PER

HIGH
PERFORMANCE

METALLICA

D:TALES_x

nachik 



METALLICA

Composition: 70% PVC, 30% Polyester

Weight: 800 gsm \pm 50 g/m²

Width: 140 cm

Thickness (mm): 1.0mm \pm 0.1mm

Tear Strength N (BS EN ISO-3377-1:2002) : >25N

Flexing Resistance (BS EN ISO 5402:2002): 100,000 cycles, Pass

Resistance to cold crack (BSEN ISO 17233:2002): No cracking, Pass

Colour Fastness to Light- (BS EN ISO 105-B02:1999)
(Minimum BWS** 5): Grade 5

Hydrolysis -DIN EN ISO 32 100/ DIN 53 359 (Jungle testing): 10 weeks

Abrasion (Martindale) (EN ISO 12947-2): 100,000, Pass

Abrasion (Wyzenbeek) (ASTM D4157-2007): 100,000 rubs, pass

Anti-Mildew (ISO 22196-2007) (ASTM Test Method 147, ASTM Test Method 30-III): Pass.

Spotless finish for easy cleaning

Flammability BS5852 Crib 5 Cigarette and Match: Pass

IMO: 2010 FTP Code Part 8 Appendix 1 Fire test procedures for the ignitability by smoker's materials of upholstered composites for seating – Pass

REACH standard: Complies

Cleaning instructions:

Clean stains with dry cloth by rubbing the spot gently in circular movements.

In case of stubborn stains, use water based cleaning agent with a mild detergent or a non-solvent upholstery shampoo. Dry immediately after cleaning with a dry, soft cloth.



F.R. COMPLIANCE



SPOTLESS
TECHNOLOGY



MOULD / BACTERIAL
RESISTANCE



7



17




27




37



3

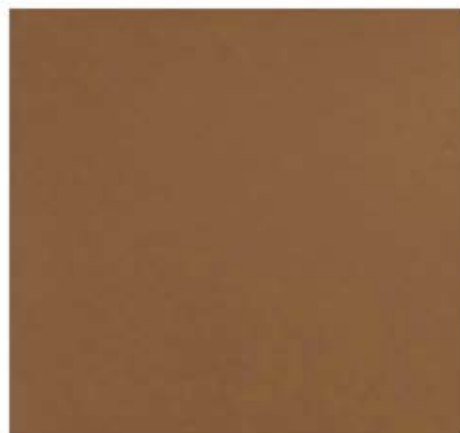

8

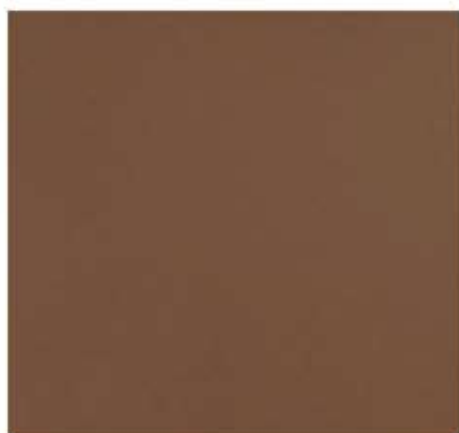


6




9



1

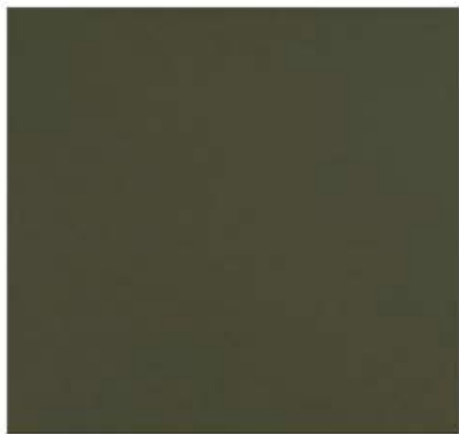

11

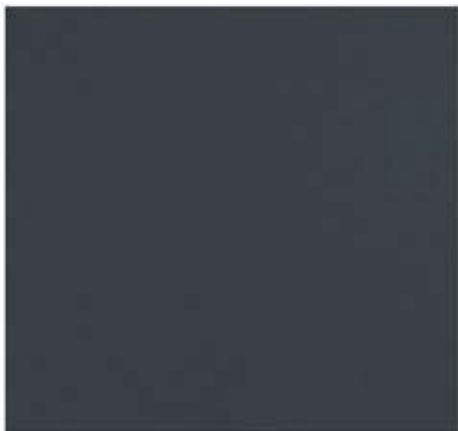

2



12



5



10



20