


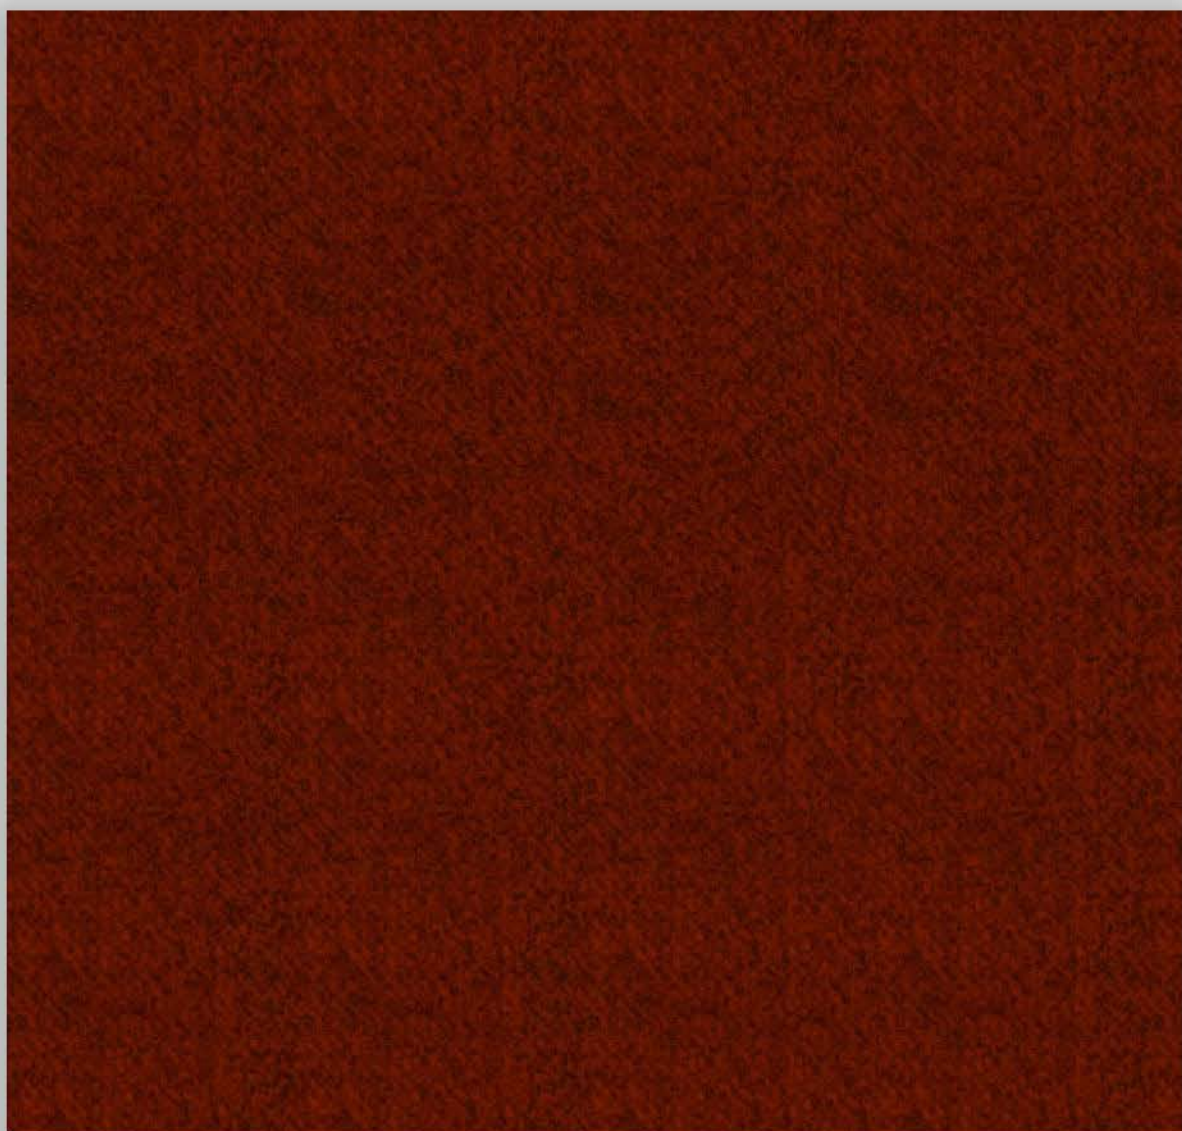

Composition: 100% Polyester

Weight: 430 gsm

Width: 142 cm

Abrasion resistance: (BS EN ISO 12947-2/BS EN 14465: 2003 Annex a): >40,000 rubs

Change in shade @ 3000 revs: grade: grade 4

Wyzenbeek Abrasion (ASTM D4157): >51,000 Double Rubs

Martindale Abrasion (ASTM D4966): No Wear at 51,000 movements

Martindale pilling - BS EN ISO 12945-2: 2000: 4-5

Martindale Pilling (ASTM D4970): Grade 4.5

Colour fastness to rubbing (dry): BS EN ISO 105 x 12: 2016: 4-5

Colour fastness to rubbing (wet): BS EN ISO 105 x 12: 2016: 3-4

Colour fastness to light STD 5: BS EN ISO 105 B02: 2014: 5

Color Fastness to Wet /Dry Crocking (AATCC 8): Wet 4.5, Dry 4.5

Seam Slippage (ASTM D4034): Warp 110, Fill 161.2


Breaking (Tensile) Strength (ASTM D5034): Warp 176.2, Fill 158.5

Tearing Strength (ASTM D2261): Warp 19.5, Weft 18.3

Dimensional Stability of Fabric After Home Laundering (AATCC TM135-2018t): PASS

Flame Retardant UFAC (SAME AS NFPA 260): PASS


Protected with SPOTLESS TECHNOLOGY for easy clean only with water



CUDDLE



1

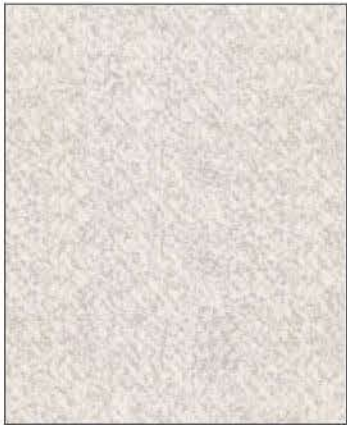

2



3




4



5



6

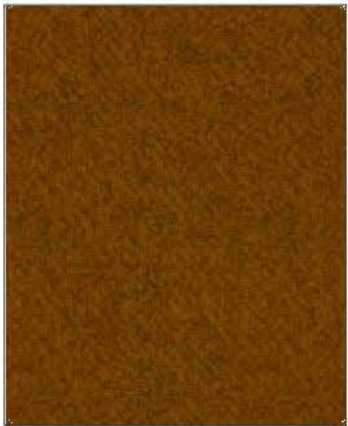

7



8



9



10




11

CUDDLE




12

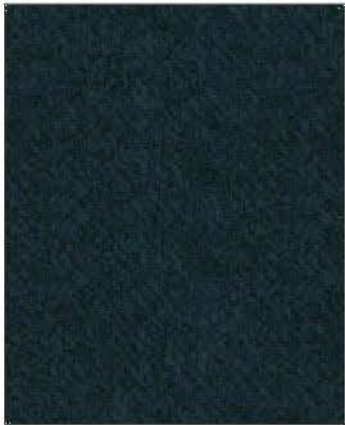


13



14

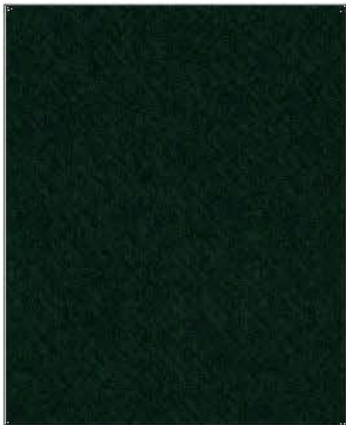

15

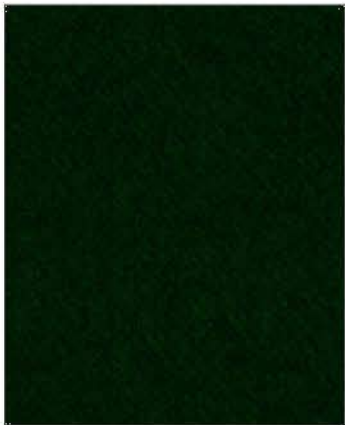

16



17



18



19



20



21



22