


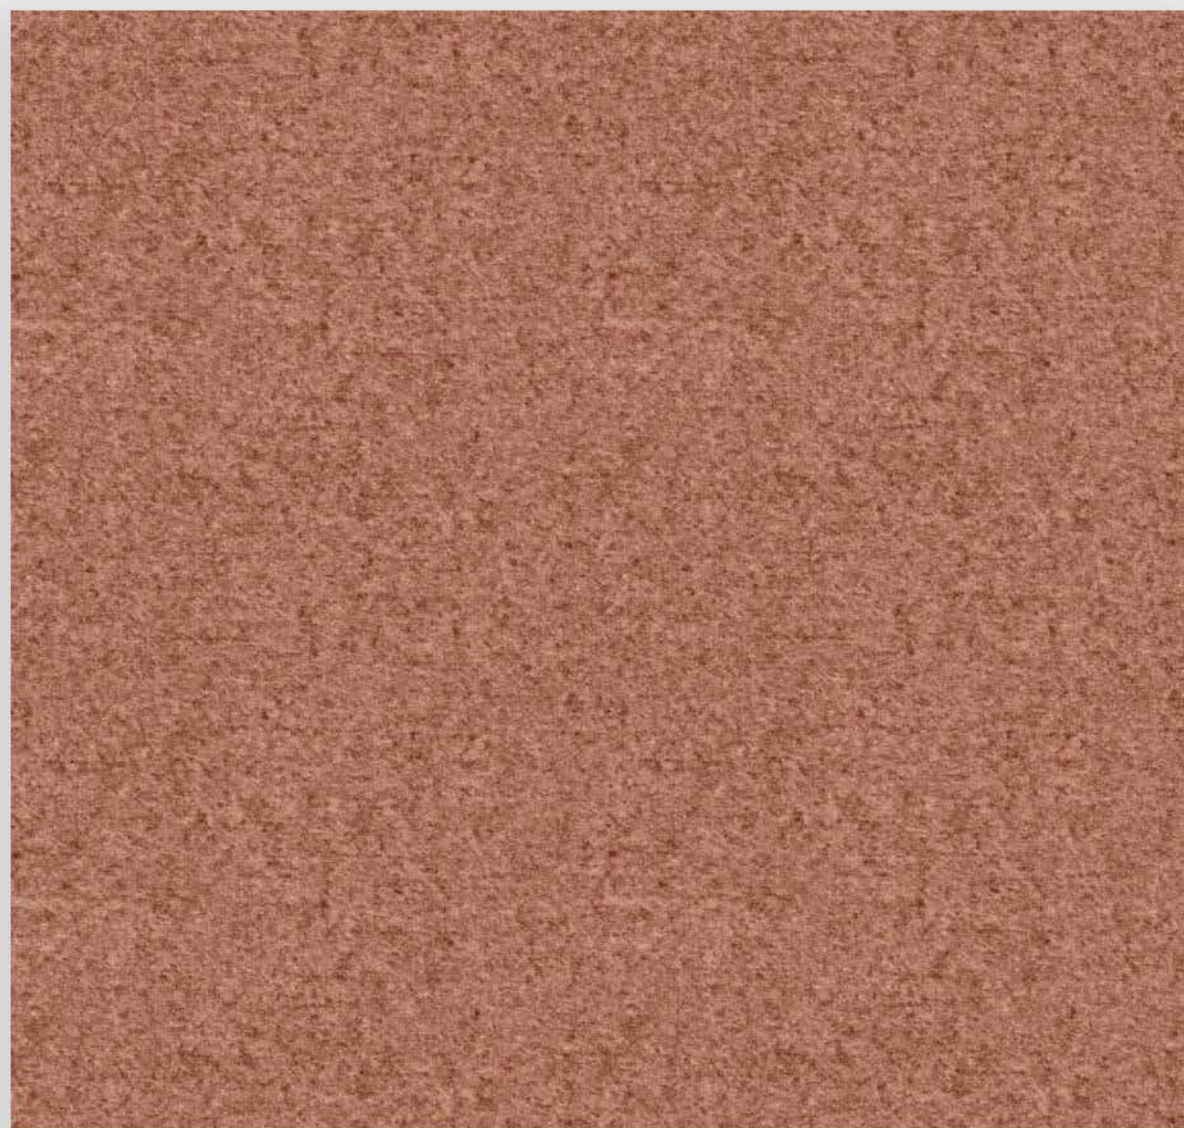

Composition: 100% polyester

Width: 145 cm

Weight: 420 gsm

Abrasion resistance: (BS EN ISO 12947-2/BS EN 14465

2003 Annex a) : >50,000 rubs

Wyzenbeek Abrasion (ASTM D4157): >100,000 Double Rubs

Change in shade @ 3000 revs: grade 4

Colour fastness to rubbing dry/ wet: (BS EN ISO 105 X 12: 2016): 4.5

Pilling Resistance ASTM D3511: 5

Colour fastness to light (GB/T 5 8427-2008): 4 pass

Seam Slippage (ASTM D4034): Warp 187.97, Fill 179.4


Breaking (Tensile) Strength (ASTM D5034): Warp 597.19, Fill 583.35

Colour fastness to washing –GB/T 12490-2014: 4-5 pass

Colour fastness to water –GB/T 5713-2013: 4-5 pass

Tensile Strength GB/T 3923.1-2013: Warp 1600, Fill 1500

Dry clean

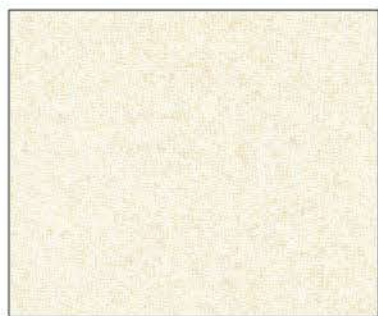

1



2



3



4



5



6



25



26



27




28



31



30

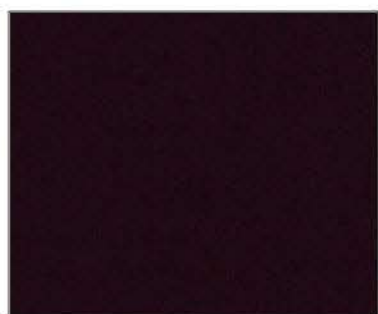

29



7



24



23




22



17



18

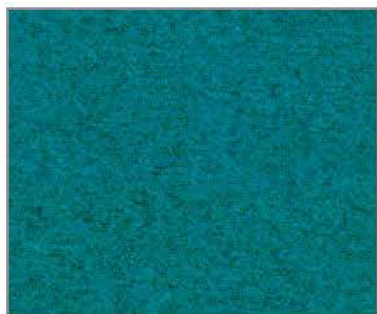

21



19



20




14



16




15

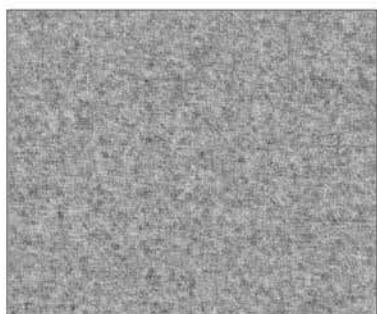

8



9

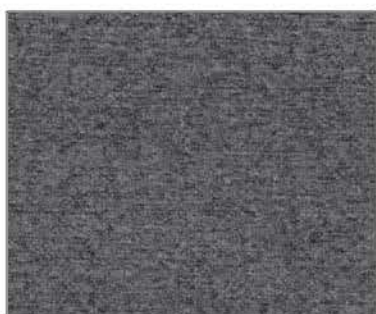

10



11



12