


StandOut Collection

Outdoor Fabrics, Anytime, Anywhere

Embrace the outdoors with confidence using our cutting-edge Outdoor Fabric Collection! Engineered for maximum durability and UV resistance, these fabrics blend high performance with a spectrum of essential hues.

Experience the ease of bleach cleaning and water resistance, coupled with the unique advantage of customizable designs at low minimums.

Elevate your outdoor décor effortlessly with our exceptional fabrics!

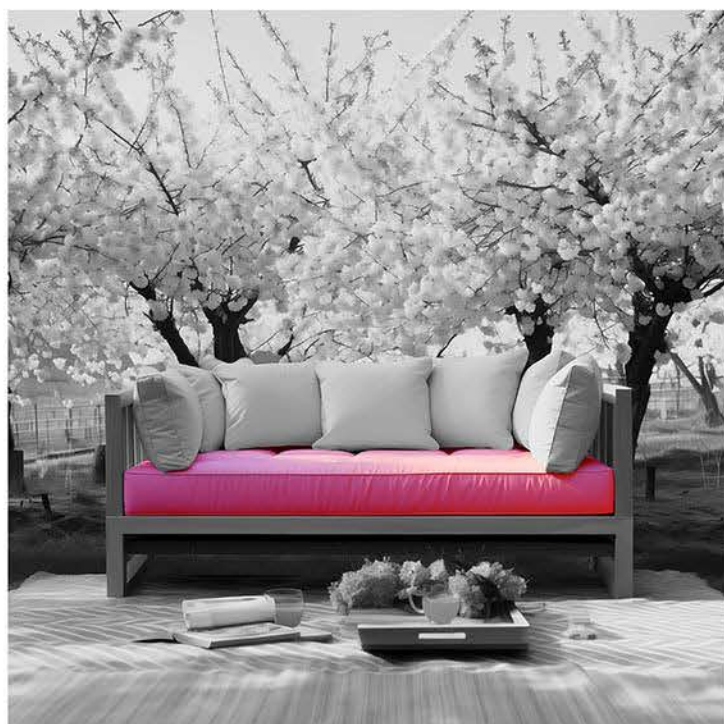

Solution dyed Polyester

2301, 2306

Composition: 100% Solution dyed polyester
Width: 150 cm, Weight: 250 gsm

2302

Composition: 100% Solution dyed polyester
Width: 150 cm, Weight: 210 gsm

2303

Composition: 100% Solution dyed polyester
Width: 150 cm, Weight: 200 gsm

2304, 2305

Composition: 100% Solution dyed polyester
Width: 150 cm, Weight: 230 gsm

2307

Composition: 100% Solution dyed polyester
Width: 150 cm, Weight: 240 gsm

2309

Composition: 100% Solution dyed spun polyester
Width: 150 cm, Weight: 270 gsm

2313, 2315, 2316

Composition: 100% Solution dyed polyester
Width: 150 cm, Weight: 300 gsm

Wyzenbeek Abrasion (ASTM D4157): 50,000 Double Rubs
Colorfastness to Light (AATCC16-3-2014: Xenon-Arc Lamp): After 1500H @ 4
Colorfastness to Artificial Light (EN ISO 105 - B02): 7-8
Colorfastness to Artificial Weathering (BS EN ISO 105 - B04): 7-8
Colorfastness to Water (BS EN ISO 105 - E01): 4-5
Colorfastness to Rubbing (BS EN ISO 105 - X12 Dry / Wet): 4-5
Colorfastness to Chlorinated pool water (BS EN ISO 105 - E03): 4-5
Water Repellency Spray Test (AATCC Test Method 22 – 2005): 90
Solar UV protective (AATCC 183 -2014): UPF 50+
Seam Slippage (BS EN ISO 13936-2): Warp 3mm / Weft 3mm
Pilling Resistance (ASTM D3511): 5
Flammability CAL 117-2013, Section E: PASS
Flame Retardant UFAC-Fabric, class-1: PASS
Flame Retardant BS EN 1021-1: PASS
Water repellent finish

Cleaning Recommendation

Fabric can be spot washed by sponging briskly with a soapy solution of natural soap in lukewarm water. Rinse thoroughly and allow to air dry. For stubborn stains and or mildew, chlorine bleach can be added to this solution, it will not affect the color of the fabric.

Bleach cleanable



StandOut Collection



2301




2302




2303



2304

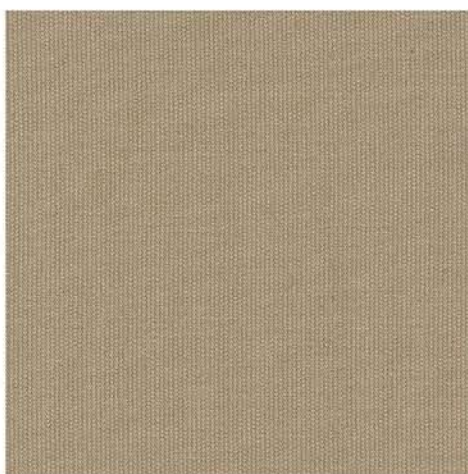

2305

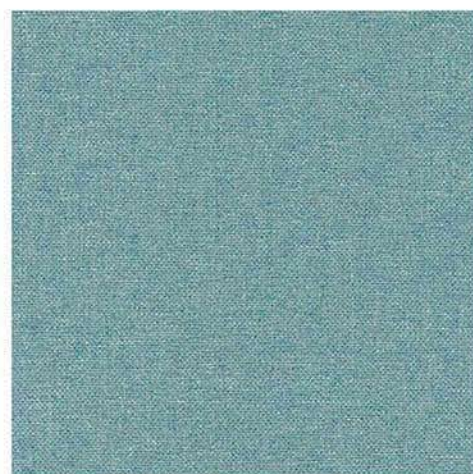

2306



2307



2309

Solution dyed Acrylic

3301

Wyzenbeek Abrasion (ASTM D4157): 50,000 Double Rubs

Colorfastness to Light (AATCC16-3-2014: Xenon-Arc Lamp): After 2000H @ 4

Colorfastness to Artificial Light (EN ISO 105 - B02): 8

Colorfastness to Artificial Weathering (BS EN ISO 105 - B04): 8

Colorfastness to Water (BS EN ISO 105 - E01): 4-5

Colorfastness to Rubbing (BS EN ISO 105 - X12 Dry / Wet): 4-5

Colorfastness to Chlorinated pool water (BS EN ISO 105 - E03): 4-5

Water Repellency Spray Test (AATCC Test Method 22 – 2005): 90

Solar UV protective (AATCC 183 -2014): UPF 50+

Seam Slippage (BS EN ISO 13936-2): Warp 3mm / Weft 3mm

Pilling Resistance (ASTM D3511): 5

Flammability CAL 117-2013, Section E: PASS

Flame Retardant UFAC-Fabric, class-1: PASS

Flame Retardant BS EN 1021-1: PASS

Water repellent finish

Cleaning Recommendation

Fabric can be spot washed by sponging briskly with a soapy solution of natural soap in lukewarm water. Rinse thoroughly and allow to air dry. For stubborn stains and or mildew, chlorine bleach can be added to this solution it will not affect the color of the fabric.

Bleach cleanable



Outdoor Prints

100% polyester

Wyzenbeek Abrasion (ASTM D4157): 50,000 Double Rubs
Colorfastness to Light (AATCC16-3-2014: Xenon-Arc Lamp After 500H @ 3.5-4
Colorfastness to Artificial Light (EN ISO 105 - B02): 7-8
Colorfastness to Artificial Weathering (BS EN ISO 105 - B04): 7-8
Colorfastness to Water (BS EN ISO 105 - E01): 4-5
Colorfastness to Rubbing (BS EN ISO 105 - X12 Dry / Wet): 4-5
Colorfastness to Chloriated pool water (BS EN ISO 105 - E03): 4-5
Water Repellency Spray Test (AATCC Test Method 22 – 2005): 90
Solar UV protective (AATCC 183 -2014): UPF 50+
Seam Slippage (BS EN ISO 13936-2): Warp 3mm / Weft 3mm
Pilling Resistance (ASTM D3511): 5
Flammability CAL 117-2013, Section E: PASS
Flame Retardant UFAC-Fabric, class-1: PASS
Flame Retardant BS EN 1021-1: PASS
Water repellent finish

Cleaning Recommendation

Fabric can be spot washed by sponging briskly with a soapy solution of natural soap in lukewarm water.
Rinse thoroughly and allow to air dry.



StandOut Collection

Outdoor Prints




OUTDOOR BANANA




OUTDOOR FOREST



OUTDOOR JUNGLE

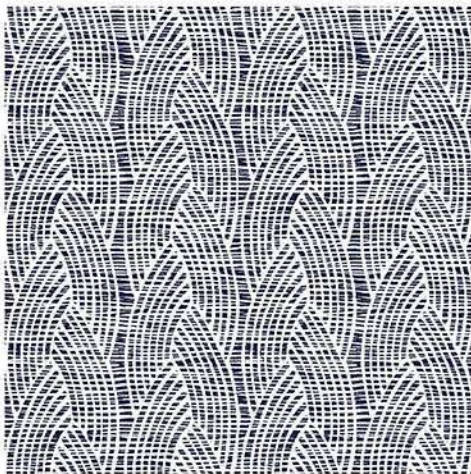


BLUE OUTDOOR 1

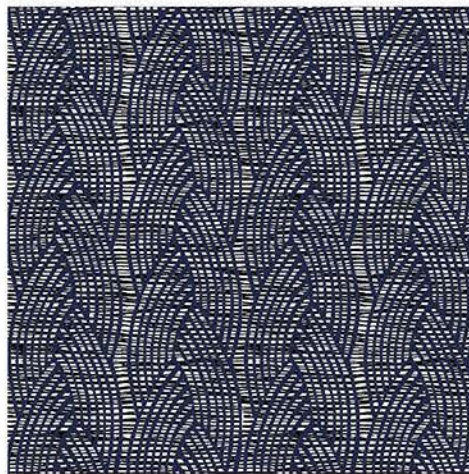

BLUE OUTDOOR 1A



BLUE OUTDOOR 2

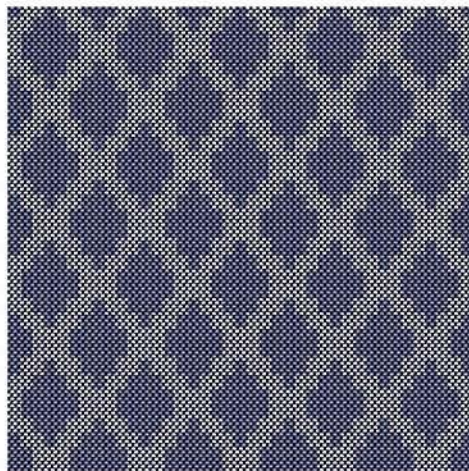

BLUE OUTDOOR 3