



# OutStanding

Worry-free Bleach cleanable Collection



# OutStanding

## Worry-free Bleach cleanable Collection

### Introducing OutStanding Collection: Revolutionizing Upholstery with Unmatched Durability and Elegance

Experience the epitome of upholstery innovation with our OutStanding Collection, meticulously crafted from solution-dyed polyester yarns. Designed to redefine high performance, this collection sets new standards in durability, cleanliness, and style.

### Unparalleled Performance:

Say goodbye to worries about maintenance and durability. The OutStanding Collection is the ultimate worry-free upholstery fabric, capable of withstanding high-traffic areas or busy home environments. Its bleach-cleanable nature ensures effortless maintenance, making it a perfect choice for both indoor and outdoor use.

### Luxurious Comfort:

Despite its robustness, the spun yarns used in these fabrics offer a sumptuously soft and luxurious hand. This collection ensures a touch of comfort without compromising on durability.

### Outdoor:


Experience the pinnacle of upholstery innovation with the Outstanding Collection. Elevate your space with confidence, even outdoor, knowing that durability, cleanliness, and style are seamlessly woven into every fiber of these remarkable fabrics

### Mildew and Mold Resistance:

For added peace of mind, all fabrics within the collection boast mildew and mold resistance, ensuring longevity even in damp or challenging environments this added feature makes it the ultimate choice for any hospitality project.

### Sustainability:

Our solution dyeing process not only ensures vibrant colors but also significantly reduces water consumption, chemicals, and CO2 emissions. The solid color integrity throughout the yarns guarantees long-lasting hues, resistant to fading even under intense UV exposure. Fabrics are protected by CO water repellent finish PFAS free. This environmentally responsible approach is a testament to our commitment to sustainability.



**SPLENDID**

Composition: 100% Solution dyed polyester  
Width : 142 cm, Weight : 350 g/m<sup>2</sup>  
Wyzenbeek Abrasion (ASTM D4157- wire screen method): >15,000 Double Rubs  
Breaking (Tensile) Strength (ASTM D5034): Warp 221.9, Fill 288.8  
Elongation (USF 1979-12): Warp 1.08, Fill 0.7  
Tear Strength (ASTM D2261): Warp 45.9, Fill 37.5  
Seam Slippage (Slippage at 6.4MM-1/4 inch) (ASTM D4034): Warp 67.1, Fill 97.2  
Seam Strength (ASTM D1683): Warp 96.9, Fill 97.2  
Crocking (AATCC-8-2007): Wet 4.5, Dry 4.5  
Colorfastness to Light AATCC Test Method 16.3: 3.5  
Anti-bacterial  
Anti mildew  
Water repellent finish PFAS free

**SUPERB**

Composition: 100% Solution dyed polyester  
Width : 142 cm, Weight : 400 g  
Wyzenbeek Abrasion (ASTM D4157- wire screen method): >15,000 Double Rubs  
Breaking (Tensile) Strength (ASTM D5034): Warp 349.1, Fill 144.9  
Elongation (USF 1979-12): Warp 0.6, Fill 0.7  
Tear Strength (ASTM D2261): Warp 60, Fill 77.2  
Seam Slippage (Slippage at 6.4MM-1/4 inch) (ASTM D4034): Warp 88.2, Fill 62.6  
Seam Strength (ASTM D1683): Warp 88.2, Fill 102.8  
Crocking (AATCC-8-2007): Wet 4.5, Dry 4.5  
Colorfastness to Light AATCC Test Method 16.3: 3.5  
Dynamic Seam Fatigue (ASTM D4033, DURANT): Warp/Fill (3500 cycles) 1mm, Warp/Warp (3500 cycles) 1mm, Fill/Fill (3500 cycles) 1mm  
Anti-bacterial  
Anti mildew  
Water repellent finish PFAS free

**FAB**

Composition: 100% Solution dyed polyester  
Width : 142 cm, Weight : 510 gsm  
Wyzenbeek Abrasion (ASTM D4157- wire screen method): >15,000 Double Rubs  
Breaking (Tensile) Strength (ASTM D5034): Warp 335.4, Fill 259.3  
Elongation (USF 1979-12): Warp 1.2, Fill 0.6  
Tear Strength (ASTM D2261): Warp 52.5, Fill 94.3  
Seam Slippage (Slippage at 6.4MM-1/4 inch) (ASTM D4034): Warp 100.5, Fill 85.8  
Seam Strength (ASTM D1683): Warp 100.5, Fill 89.9  
Crocking (AATCC-8-2007): Wet 4.5, Dry 4.5  
Colorfastness to Light AATCC Test Method 16.3: 3.5  
Dynamic Seam Fatigue (ASTM D4033, DURANT): Warp/Fill (3500 cycles) 1mm, Warp/Warp (3500 cycles) 1mm, Fill/Fill (3500 cycles) 1mm  
Anti-bacterial  
Anti mildew  
Water repellent finish PFAS free



**UNIQUE**

Composition: 100% Solution dyed polyester

Width : 142 cm, Weight : 350 gsm

Wyzenbeek Abrasion (ASTM D4157- wire screen method): >15,000 Double Rubs

Breaking (Tensile) Strength (ASTM D5034): Warp 155.4, Fill 221.9

Elongation (USF 1979-12): Warp 0.6, Fill 0.6

Tear Strength (ASTM D2261): Warp 30.8, Fill 26.3

Seam Slippage (Slippage at 6.4MM-1/4 inch) (ASTM D4034): Warp 112.9, Fill 121.8

Seam Strength (ASTM D1683): Warp 113.8, Fill 121.8

Crocking (AATCC-8-2007): Wet 4.5, Dry 4.5

Colorfastness to Light AATCC Test Method 16.3: 3.5

Anti-bacterial

Anti mildew

Water repellent finish PFAS free

**GRAND**

Composition: 100% Solution dyed polyester

Width : 142 cm, Weight : 420 gsm

Wyzenbeek Abrasion (ASTM D4157- wire screen method): >15,000 Double Rubs

Breaking (Tensile) Strength (ASTM D5034): Warp 315.2, Fill 101.9

Elongation (USF 1979-12): Warp 0.9, Fill 0.8

Tear Strength (ASTM D2261): Warp 33.2, Fill 64.2

Seam Slippage (Slippage at 6.4MM-1/4 inch) (ASTM D4034): Warp 90, Fill 66

Seam Strength (ASTM D1683): Warp 90, Fill 91.7

Crocking (AATCC-8-2007): Wet 4.5, Dry 4.5

Colorfastness to Light AATCC Test Method 16.3: 3.5

Dynamic Seam Fatigue (ASTM D4033, DURANT): Warp/Fill (3500 cycles) 1mm, Warp/Warp (3500 cycles) 1mm, Fill/Fill (3500 cycles) 1mm

Anti-bacterial

Anti mildew

Water repellent finish PFAS free

**NOVEL**

Composition: 100% Solution dyed polyester

Width : 142 cm, Weight : 340 gsm

Wyzenbeek Abrasion (ASTM D4157- wire screen method): >15,000 Double Rubs

Breaking (Tensile) Strength (ASTM D5034): Warp 165.4, Fill 230.1

Elongation (USF 1979-12): Warp 0.8, Fill 0.6

Tear Strength (ASTM D2261): Warp 27.4, Fill 47.2

Seam Slippage (Slippage at 6.4MM-1/4 inch) (ASTM D4034): Warp 101.1, Fill 112.8

Seam Strength (ASTM D1683): Warp 106.9, Fill 112.8

Crocking (AATCC-8-2007): Wet 4.5, Dry 4.5

Colorfastness to Light AATCC Test Method 16.3: 3.5

Dynamic Seam Fatigue (ASTM D4033, DURANT): Warp/Fill (3500 cycles) 1mm, Warp/Warp (3500 cycles) 1mm, Fill/Fill (3500 cycles) 1mm

Anti-bacterial

Anti mildew

Water repellent finish PFAS free




**Cleaning Recommendation**

Fabric can be spot washed by sponging briskly with a soapy solution of natural soap in lukewarm water. Rinse thoroughly and allow to air dry. For stubborn stains and or mildew, chlorine bleach can be added to this solution, it will not affect the color of the fabric.


Bleach cleanable



GRAND

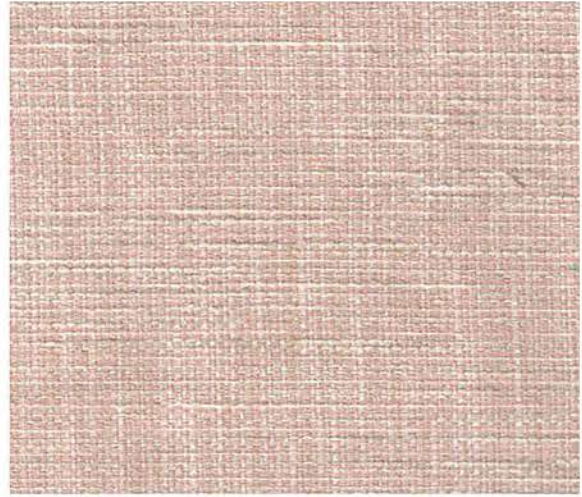


NOVEL

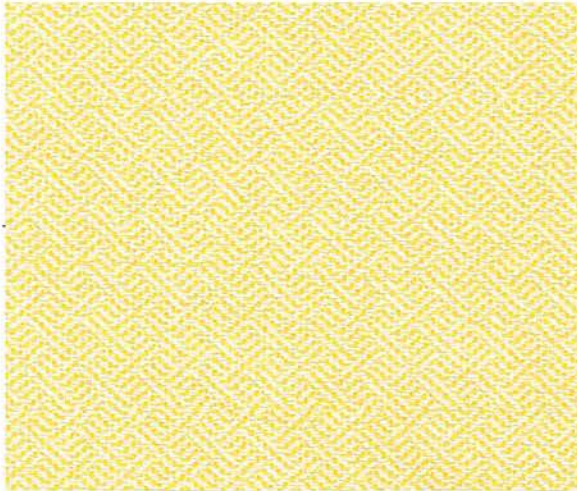


UNIQUE



SPLENDID

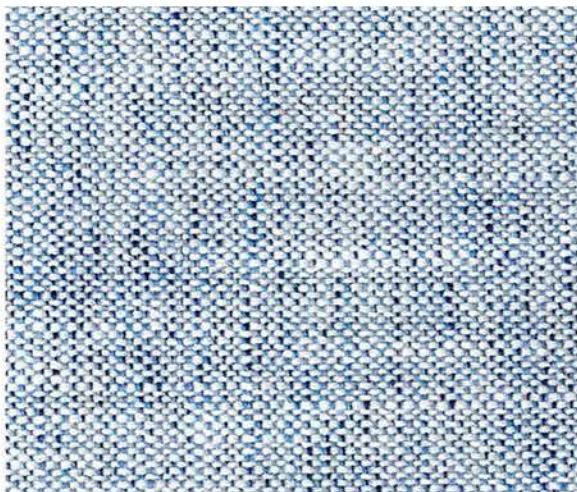

FAB

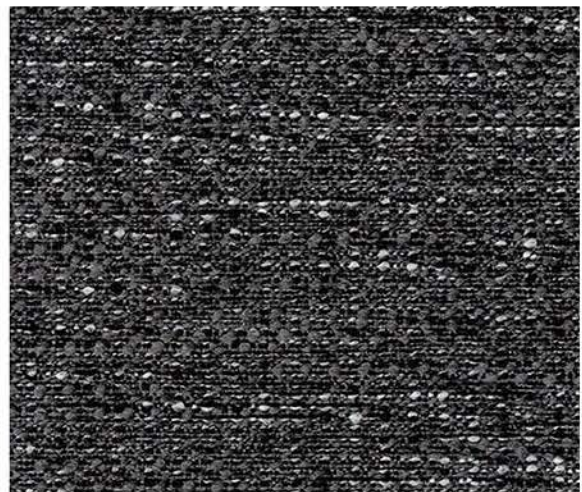

SUPERB





# OutStanding

Worry-free Bleach cleanable Collection

