

WATER REPELLENT, ANTI BACTERIAL, ANTI MILDEW
OUTDOOR



Composition: 100% Solution dyed polyester

Width: 142 cm, Weight: 510 gsm

Wyzenbeek Abrasion (ASTM D4157- wire screen method): >15,000 Double Rubs

Breaking (Tensile) Strength (ASTM D5034): Warp 335.4, Fill 259.3

Elongation (USF 1979-12): Warp 1.2, Fill 0.6

Tear Strength (ASTM D2261): Warp 52.5, Fill 94.3

Seam Slippage (Slippage at 6.4MM-1/4 inch) (ASTM D4034): Warp 100.5, Fill 85.8

Seam Strength (ASTM D1683): Warp 100.5, Fill 89.9

Crocking (AATCC-8-2007): Wet 4.5, Dry 4.5

Colorfastness to Light AATCC Test Method 16.3: 3.5

Dynamic Seam Fatigue (ASTM D4033, DURANT): Warp/Fill (3500 cycles) 1mm,

Warp/Warp (3500 cycles) 1mm, Fill/Fill (3500 cycles) 1mm

Anti-bacterial

Water repellent finish PFAS free

Cleaning Recommendation

Fabric can be spot washed by sponging briskly with a soapy solution of natural soap in lukewarm water. Rinse thoroughly and allow to air dry. For stubborn stains and or mildew, chlorine bleach can be added to this solution, it will not affect the color of the fabric.

Bleach cleanable



FAB MULTI STRIPE 202




FAB CHECK 302




FAB THIN STRIPE 102



FAB 20



FAB 12



FAB 22



FAB 7



FAB MULTI STRIPE 201




FAB CHECK 301



FAB THIN STRIPE 104




FAB THIN STRIPE 101

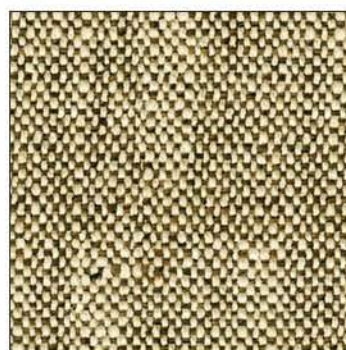

FAB 4



FAB 47

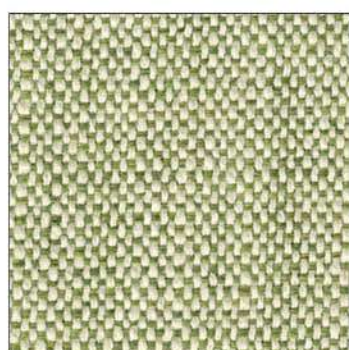

FAB 1



FAB 11



FAB MULTI STRIPE 205



FAB CHECK 305




FAB THIN STRIPE 105



FAB THIN STRIPE 114



FAB 17

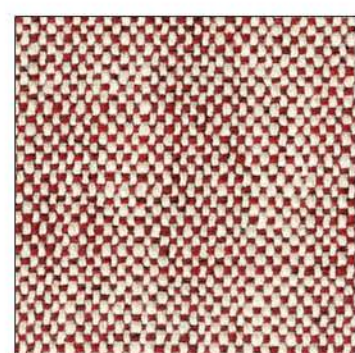


FAB 5



FAB 24



FAB MULTI STRIPE 210

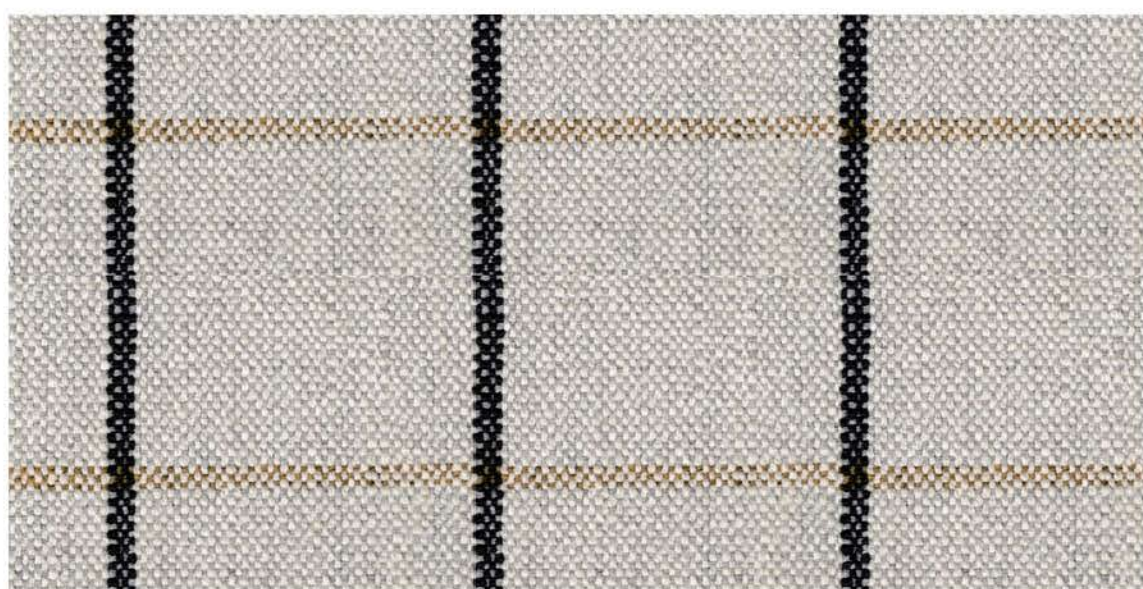

FAB CHECK 310



FAB THIN STRIPE 110



FAB 20



FAB 30



FAB 40



FAB 10



FAB 7



FAB 17



FAB 21



FAB 37




FAB 27



FAB 47



FAB 57



FAB 4



FAB 24



FAB 3



FAB 14




FAB 11



FAB 1



FAB 5



FAB 15



FAB 20




FAB 30



FAB 40



FAB 10



FAB 2



FAB 22



FAB 12