

WATER REPELLENT, ANTI BACTERIAL, OUTDOOR



Composition: 100% Solution dyed polyester

Width: 142 cm, Weight: 510 gsm

Wyzenbeek Abrasion (ASTM D4157- wire screen method): >15,000 Double Rubs

Breaking (Tensile) Strength (ASTM D5034): Warp 335.4, Fill 259.3

Elongation (USF 1979-12): Warp 1.2, Fill 0.6

Tear Strength (ASTM D2261): Warp 52.5, Fill 94.3

Seam Slippage (Slippage at 6.4MM-1/4 inch) (ASTM D4034): Warp 100.5, Fill 85.8

Seam Strength (ASTM D1683): Warp 100.5, Fill 89.9

Crocking (AATCC-8-2007): Wet 4.5, Dry 4.5

Colorfastness to Light AATCC Test Method 16.3: 3.5

Dynamic Seam Fatigue (ASTM D4033, DURANT): Warp/Fill (3500 cycles) 1mm,

Warp/Warp (3500 cycles) 1mm, Fill/Fill (3500 cycles) 1mm

Anti-bacterial

Water repellent finish PFAS free

Cleaning Recommendation

Fabric can be spot washed by sponging briskly with a soapy solution of natural soap in lukewarm water. Rinse thoroughly and allow to air dry. For stubborn stains and or mildew, chlorine bleach can be added to this solution, it will not affect the color of the fabric.

Bleach cleanable



7



17



21



37



27



47



57



4



24



3



14



11




1



5



15

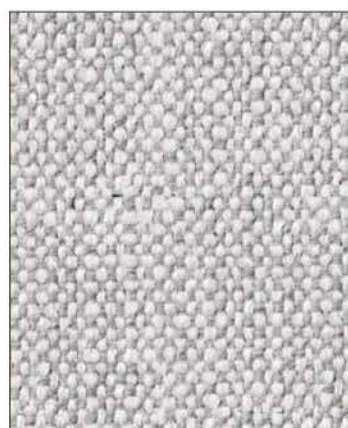

20



30



40




10



2



22

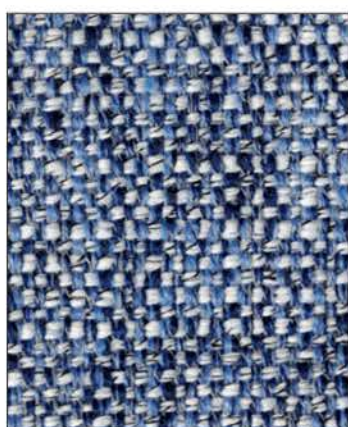

12