


OUTDOOR, ANTI-BACTERIAL, EASY CLEAN, FR

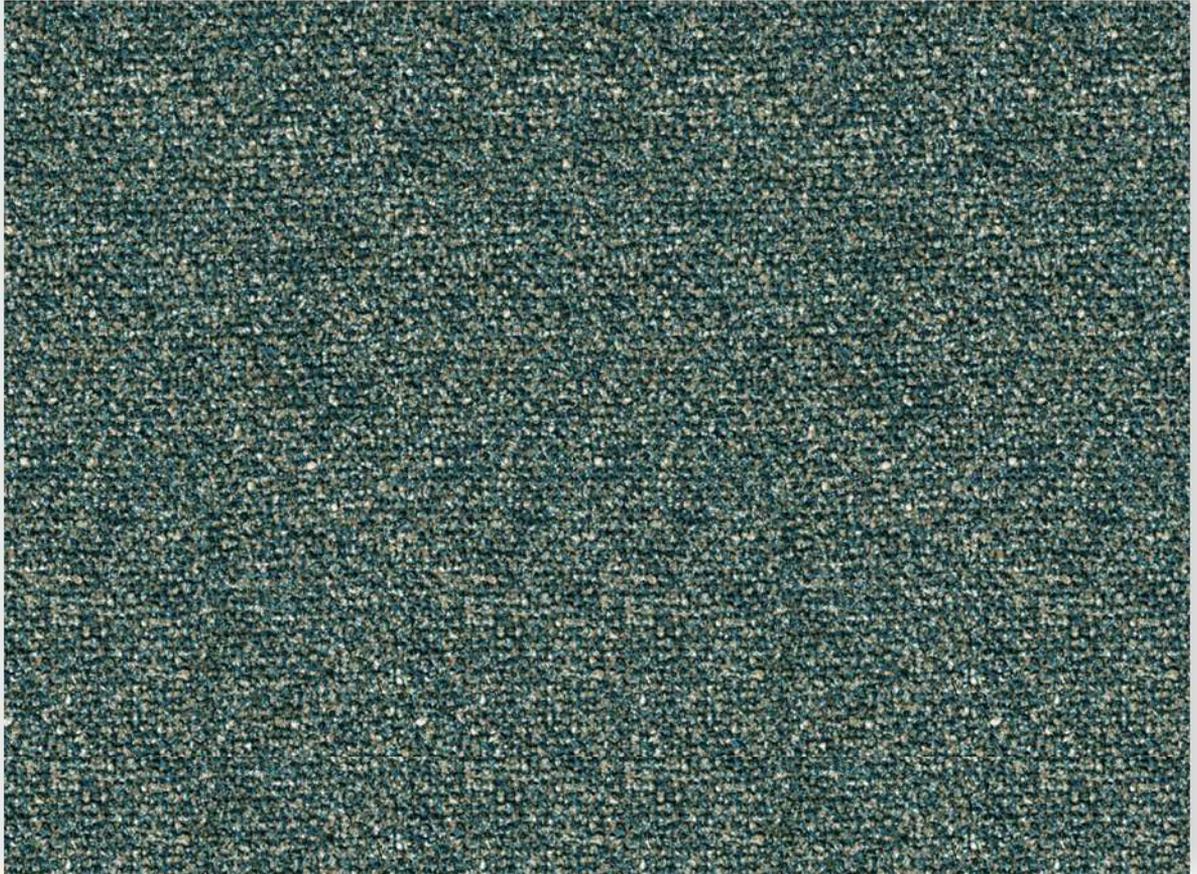

Composition: 80% PVC, 20% Polyester

Width: 138 cm

Weight: 700 gsm

Thickness: 1.0 mm

Abrasion resistance: (BS EN ISO 12947-2/BS EN 14465: 2003 Annex a): >50,000 rubs

Change in shade @ 6000 revs: 3-4

Colour fastness to rubbing (dry): BS EN ISO 105 x 12: 2016: 4-5

Colour fastness to rubbing (wet): BS EN ISO 105 x 12: 2016: 3-4

Abrasion (Wyzenbeek): (ASTM D4157-2007): 100,000 rubs, pass

Colour fastness to light: BS EN ISO 105 B02: 2014: 4.5

Abrasion resistance: (BS EN ISO 12947-2/BS EN 14465: 2003 Annex a): >10,000 rubs

Colour fastness to light: BS EN ISO 105 B02: 2014:

Tear Strength: (BS EN ISO-3377-1:2002) : >20N

Tensile Strength (strip) (BS EN ISO 13934-1:1999): Warp >400, weft >200

Tear Properties of Fabrics BS EN ISO 13937-3: 2000: warp 15, weft 15

Resistance to cold crack: (BS EN ISO 17233:2002): No cracking, Pass

Hydrolysis (Jungle testing): DIN EN ISO 32 100/ DIN 53 359: 10 weeks


Flame retardant: BS5852 SOURCE 0 & 1 (cigarette and matches): pass

UV Stability (ASTM D4329-05): 1000 hours, Pass


Anti- mildew ASTM G21: Pass

REACH

Clean locally with damp cloth and mild detergent.

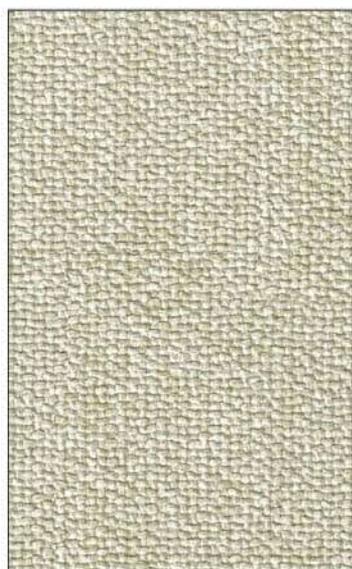

1

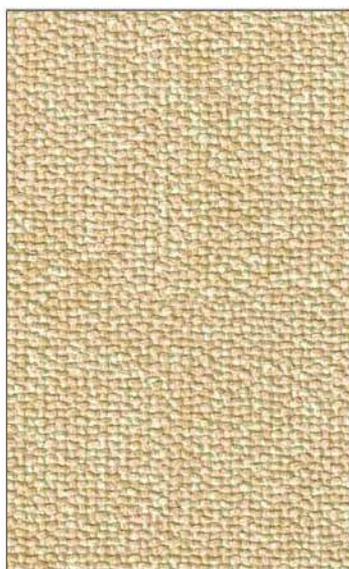

2



3



4



5



6



7



8



9



10



11



12



13



14



15



16



17