

EASY CLEAN, ANTI BACTERIAL, OUTDOOR, FR

Composition: 80% PVC, 20% Polyester

Width: 138cm

Weight: 700 gsm

Thickness: 1.2 mm \pm 0.1 mm

Abrasion resistance: (BS EN ISO 12947-2/BS EN 14465: 2003 Annex a): >100,000

Change in shade @ 3000 revs: 4-5

Colour fastness to rubbing (dry): BS EN ISO 105 x 12: 2016: 4-5

Colour fastness to rubbing (wet): BS EN ISO 105 x 12: 2016: 3-4

Colour fastness to light: BS EN ISO 105 B02: 2014:

Martindale pilling - BS EN ISO 12945-2: 2000: 4-5

Tear Strength: (BS EN ISO-3377-1:2002): >20N

Flexing Resistance: (BS EN ISO 5402:2002): 50,000 cycles, Pass

Resistance to cold crack: (BS EN ISO 17233:2002): No cracking, Pass

Anti-bacterial ASTM G21: Pass

UV Stability (ASTM D4329-05): 1000 hours, Pass

Hydrolysis (Jungle testing): DIN EN ISO 32 100/ DIN 53 359: 7 years

Flame retardant: BS 5852: Part 1: 2014, Ignition source 0 (Cigarette): Pass

Flame retardant: BS 5852: Part 1: 2014, Ignition source 1 (Match): Pass

REACH

Clean locally with damp cloth and mild detergent.



1



2



3



4




5




6



7

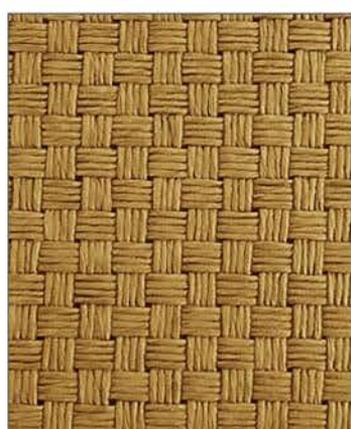

8

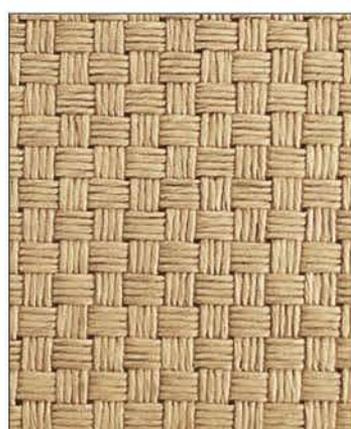


9



10



11

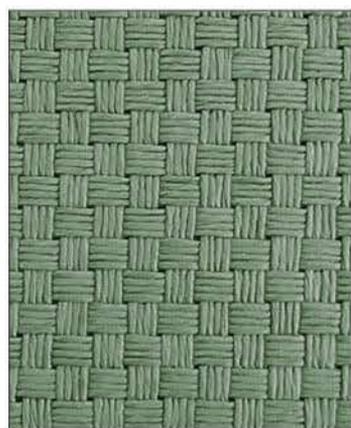

12



13




14




15



16

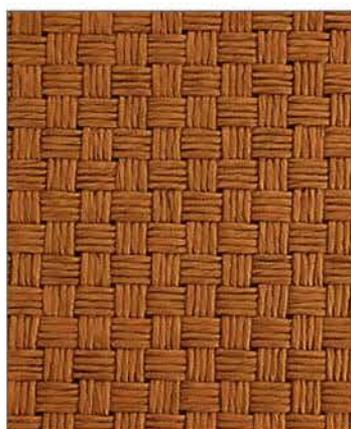


17

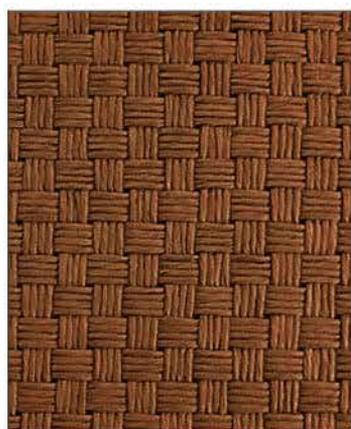


18



19

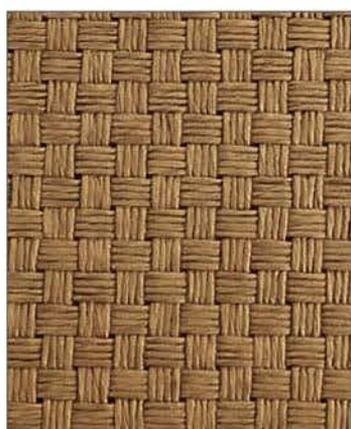

20

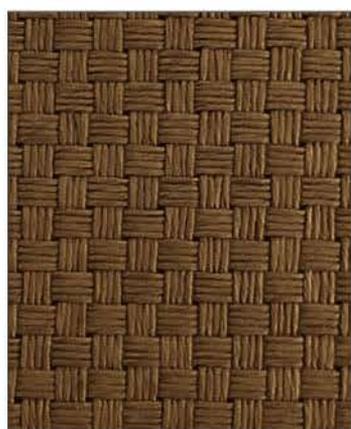

21



22



23



24



25



26



27