




nachik

MANILA

ENTWINE

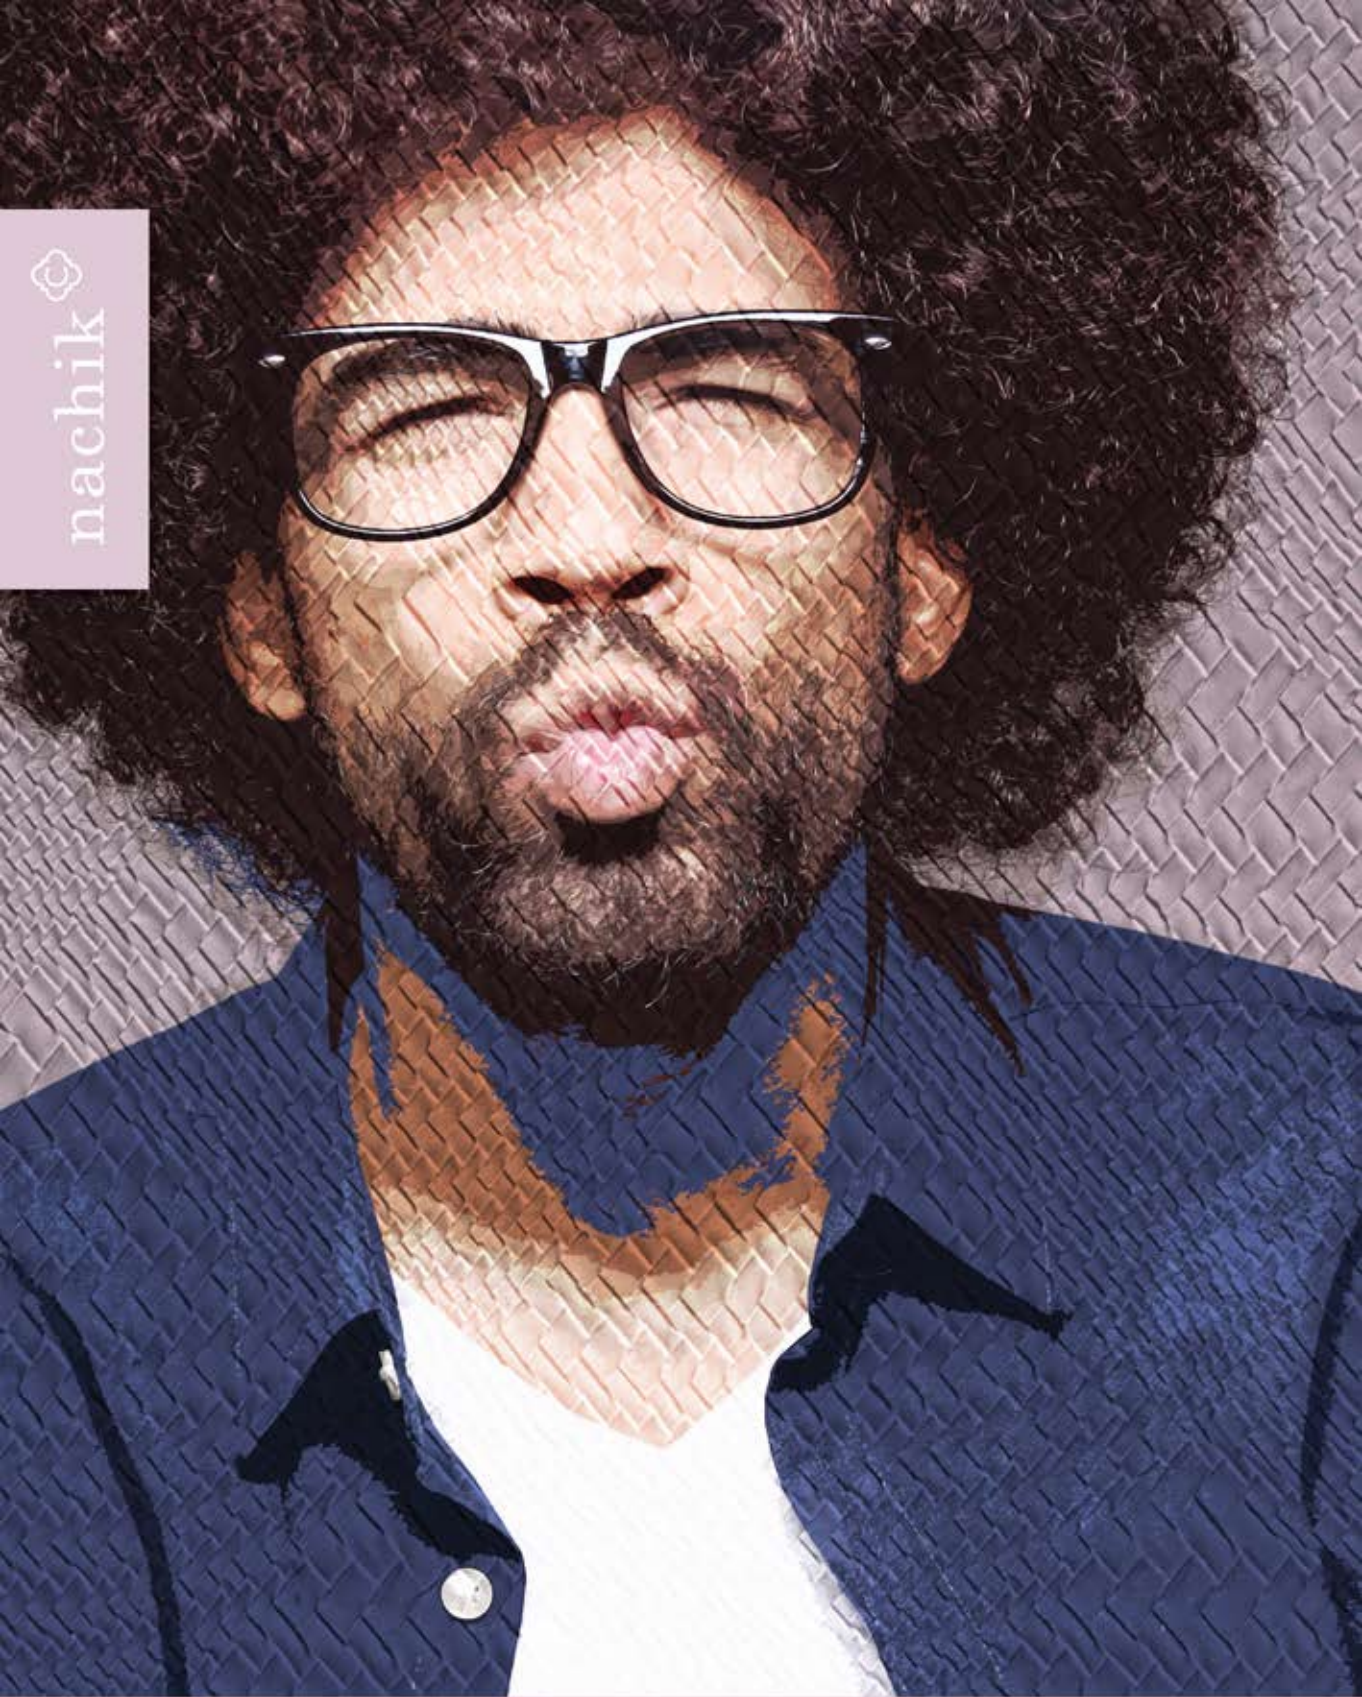

ENTWINE

MANILA

Composition: 75% PVC 25% Polyester (top 100% PVC, backing 100% Polyester)

Width: 137 cm

Weight: 840 gsm

TECHNICAL DETAILS

Abrasion resistance: (BS EN ISO 12947-2/BS EN 14465: 2003 Annex a) : >30,000 rubs

Change in shade @ 3000 revs: grade: grade 4-5

Colour fastness to rubbing (dry): BS EN ISO 105 x 12: 2002: 4/5

Colour fastness to rubbing (wet): BS EN ISO 105 x 12: 2002: 3/4

Colour fastness to light –std 5 (BS EN ISO 105 B02: 2014): 5

Breaking Strength (ASTM D5034-09 2017): Warp 121, Fill 53

Yarn Slippage (ASTM D4034-91): Warp 102, Weft 37

Flame Retardant cigarette ignition resistance (NFPA 260 standard): PASS class 1

Flame retardant: BF5852 SOURCE 0 & 1 (cigarette and matches): pass

CARE INSTRUCTIONS

Clean regularly with a damp cloth or sponge

(Use lukewarm water with a mild alkaline free soap –rinse with clean water)

Do not use: solvents / concentrated abrasive or solvent cleaning products / wax polish

Usage: Upholstery; cushions



7



17



1



4



14



20