


nachik 

ReLeather
CLASSIC

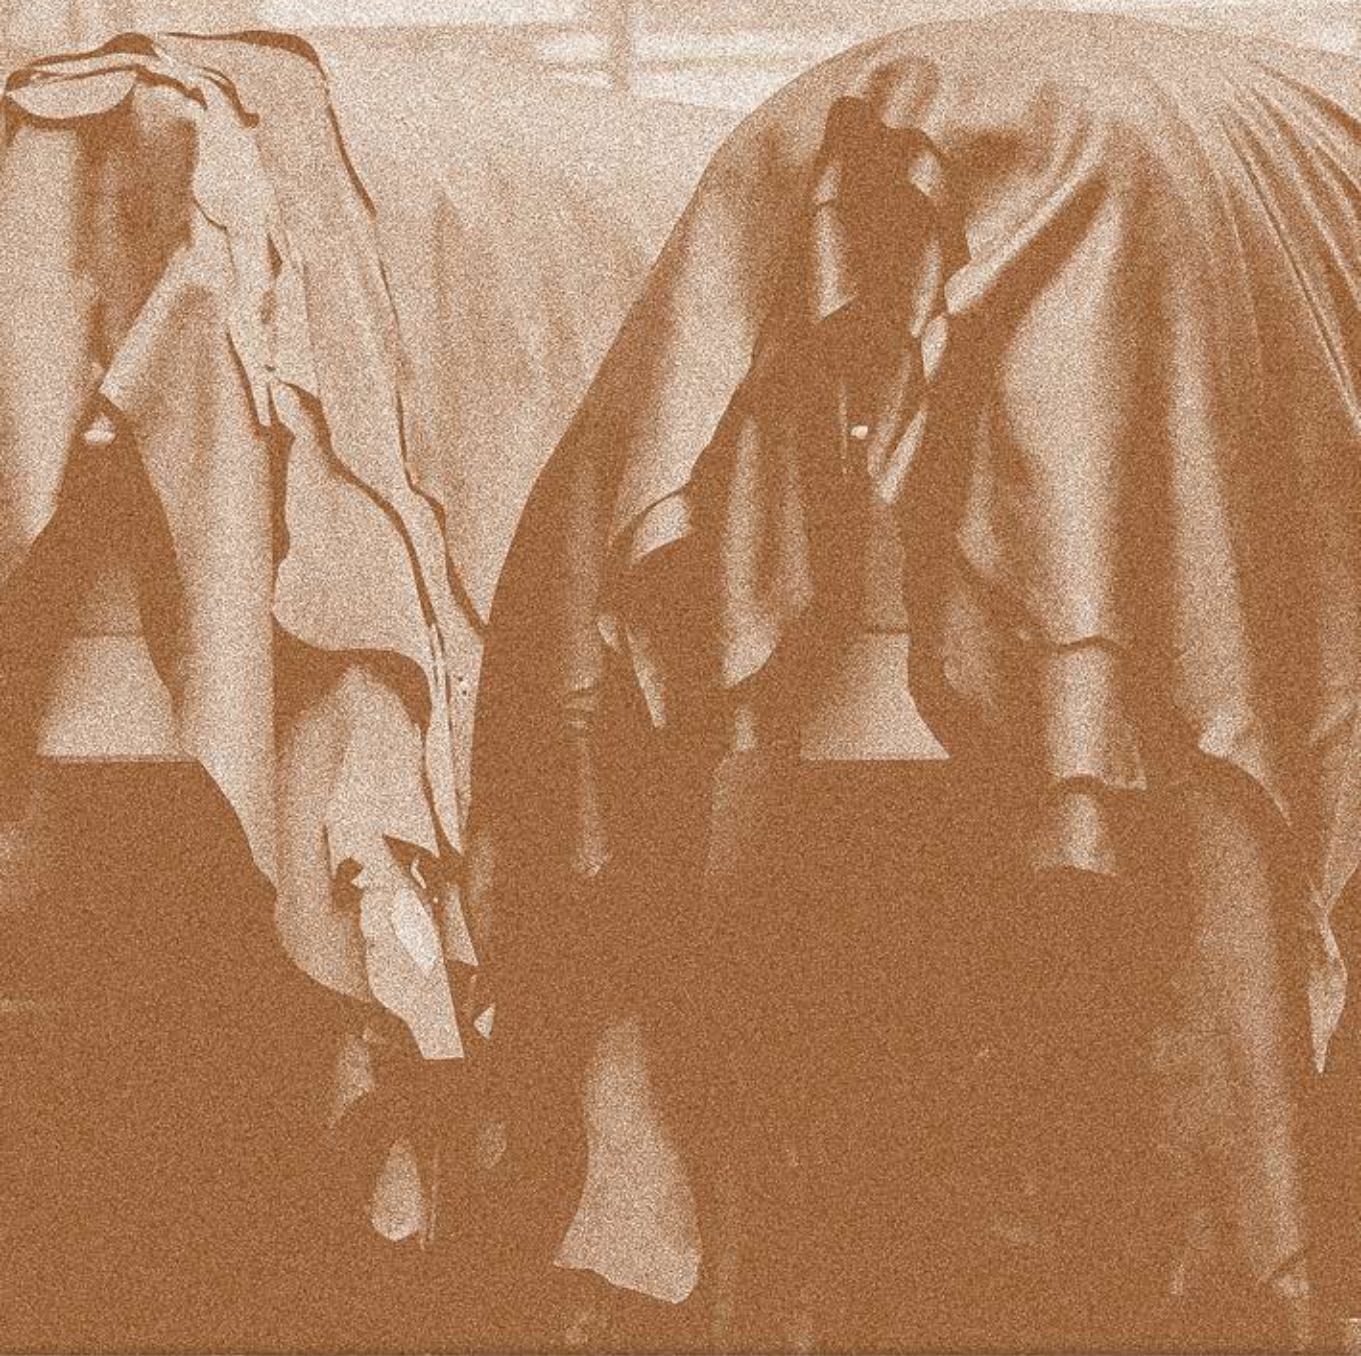

Recycled Leather By the roll

ReLeather Classic

Composition: 63% Recycled Leather, 22%CPU, 15% Polyester

Weight: 780 gsm

Width: 138 cm

Thickness: 1.2 mm

Martindale Abrasion (SATRA TM 31:2003 (2005), Method A): After 100,000 Revs.

Peel Strength (GB/T 8949-2008, 5.9, 200 mm/min.): N/A

Tensile Strength (ISO 13934-1:2013): Direction#1 910N, Direction#2 750N

Elongation at Break (ISO 13934-1:2013, 10 mm/min.): Direction#1 13.2%, Direction#2 20.2%

Tear Strength (ISO 13937-2:2000): Direction#1 47.3N, Direction#2 33.1N

Flexing Resistance (ISO 5402-1: 2017): After 50,000 Cycles Observation: No Cracking

Determination Of pH (ISO 4045-2008): 6.4

Chromium (VI) (Cr (VI)) Content (ISO 17075-1:2017): Not Detected

Formaldehyde Content (Leather) (ISO 17226-1:2018): Not Detected

Detection of Amines in Dyestuff (AZO Dyestuffs): (EN ISO 14362-1: 2017 for Textile Material/
EN ISO 17234-1: 2015 for Leather Material/EN ISO 14362-3: 2017 & EN ISO 17234-2: 2011 for
p-Aminoazobenzene): Not Detected

Extractable Heavy Metals Content (ISO 17072-1: 2019): Not Detected

Pentachlorophenol (PCP) (§64 LFGB B82.02-8:2001 or DIN EN ISO 17070:2015): Not Detected

Bursting Strength (ASTM D3786/D3786M-18, Mullen Type Burst): 19.9 kg/cm²

Lactometer Ball Burst Test (SATRA TM24: 2017; Condition in 20±2°C, 65±2% R.H for 48 Hours):

Bursting Point: 276.8N, 10.8mm

OEKO-TEX 100

REACH COMPLIANT

Clean regularly with a damp cloth or sponge

Do not use: solvents / concentrated abrasive or solvent cleaning products / wax polish

Do not fold





1



2



3



4



5



6



7



8



9



10



11



12